



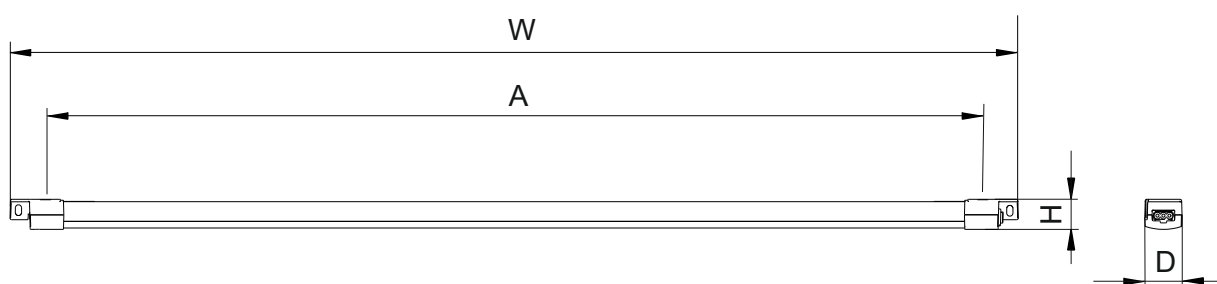

Workplace lighting Slim LED

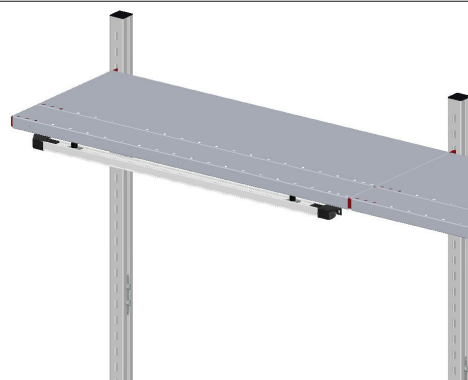

Order no.	207005	73601239
Description :	Workplace lighting Slim LED	Workplace lighting Slim LED
Operating voltage :	220-240 V AC /50Hz	220-240 V AC /50Hz
Connected load :	26,5 W	26,5 W
Luminous lux :	2500 lm	2500 lm
Protection type :	IP 20	IP 20
Protection class :	III	III
Color temperature :	4000 K	4000 K
Efficiency :	114 lm/W	114 lm/W
Width W (mm) :	889	889
Depth D (mm) :	33	33
Height H (mm) :	26,5	26,5
Mounting dimension A (mm) :	946	631 / 609
Net weight (kg):	0.5	0.5

Description:
Workplace lighting Slim LED

- Lighting housing made of anodised aluminium
- Slim design
- Satinised cover for glare-free illumination
- incl. power supply cable (4m)



Workplace lighting Slim LED


Order no.:	207005	73601239		
Number of packets:	1			
EAN:	4030177093907	4030177092603		
Size WxDxH (mm):	1045x125x70			
Weight (kg):	1.00	1.00		

Examples:
Optional accessories
for 207005

SYSTEM



4-socket outlet
Order no.: 2074



Uprights, long
Order no.: 2064



Bracket for attaching
workplace light
Order no.: 207001
207002



Add-on storage rack
Order no.: 2053




Uprights
Order no.: 700030



Power strip, 6-way
with switch
Order no.: 509500

BASIC



Add-on storage rack
Order no.: 700050

MODUL




Bracket for attaching
workplace light
Order no.: 507001

Examples:
Optional accessories
for 73601239


FLEX



4-socket outlet
Order no.: 73311600
Order no.: 73311601

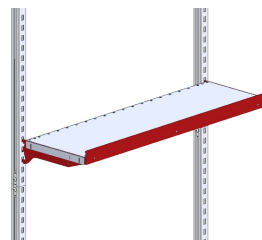

Shelves
Order no.:
73306900 -
73307600

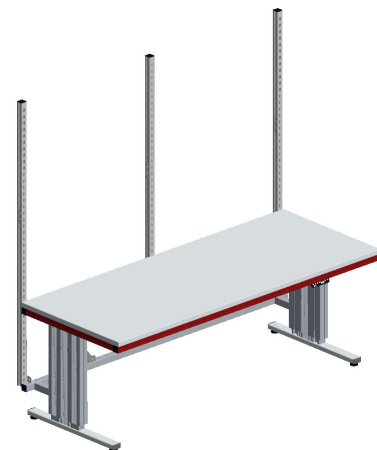

HR mounting profile, long
Order no.: 73308000
HR mounting profile, long
continuous
Order no.: 73312400